

Technical information

Aero 35/35+



Characteristics

- With one sealing bar as standard (front)
- With double seal as standard (two sealing wires)
- Optional at no extra cost: Cut-off/wide seal
- Pump maintenance and cleaning program.
- Standard sensor
- Three adjustable programs
- Standard soft air
- Standard red meat program
- Stainless steel casing and transparent lid
- Supplied with two insert plates for a faster cycle and good positioning.

Options

- Liquid control


Accessories

- Inclined insert plate (for packing liquids)
- External adapter
- Maintenance set for standard maintenance
- Trolley with shelves



Specs	Aero 35	Aero 35+
Chamber LxWxH (mm)	370x350x150	370x350x150
Machine LxWxH (mm)	543x451x454	543x451x454
Voltage	230V-1-50Hz 100V-1-50/60Hz 110/115V-1-60Hz 220V-1-60Hz	
Pump capacity 50 Hz/60 Hz (m3)	8 / 10	16 / 19
Machine cycle 50 Hz/60 Hz (sec.)	19-50 / 17-44	12-32 / 11 - 28
Power (kW)	0,4 - 0,5	0,6
Weight (kg)	36	41
Net seal length (mm)	345	345
Standard sealing bar configuration		

Dimensions mm

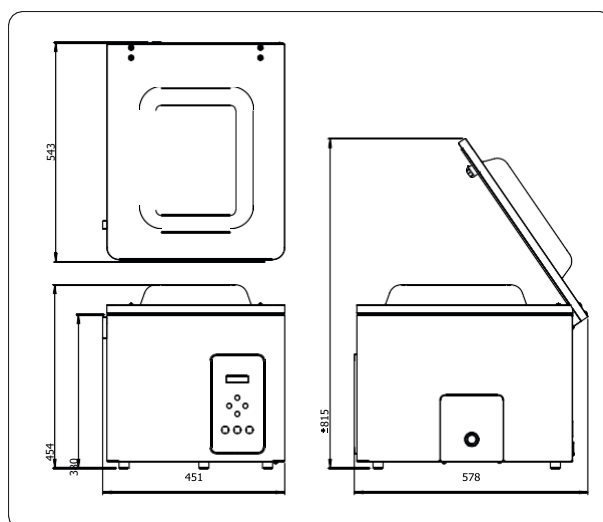

Henkelman Aust
Unit 3,14-16
Cairns Street, Loganholme
QLD Australia 4129
(07) 3806 5972

Sales/Service/Tech Support
sales@henkelman.com.au
Office Hours: 8am – 4pm
Open Monday - Friday

Technical information

Aero 42/42+



Characteristics

- With one sealing bar as standard (front)
- With double seal as standard (two sealing wires)
- Optional at no extra cost: Cut-off/wide seal
- Pump maintenance and cleaning program.
- Standard sensor
- Three adjustable programs
- Standard soft air
- Standard red meat program
- Stainless steel casing and transparent lid
- Supplied with three insert plates for a faster cycle and good positioning.

Options

- Liquid control


Accessories

- Inclined insert plate (for packing liquids)
- External adapter
- Maintenance set for standard maintenance
- Trolley with shelves



Specs	Aero 42	Aero 42+
Chamber LxWxH (mm)	370x420x180	370x420x180
Machine LxWxH (mm)	523x491x464	523x491x464
Voltage	230V-1-50Hz 100V-1-50/60Hz 110/115V-1-60Hz 220V-1-60Hz	
Pump capacity 50 Hz/60 Hz (m3)	16 / 19	21 / 25
Machine cycle 50 Hz/60 Hz (sec.)	13-38 / 11-33	12-33 / 11 - 29
Power (kW)	0,6	0,8 - 1,0
Weight (kg)	57	61
Net seal length (mm)	410	410
Standard sealing bar configuration		

Dimensions mm

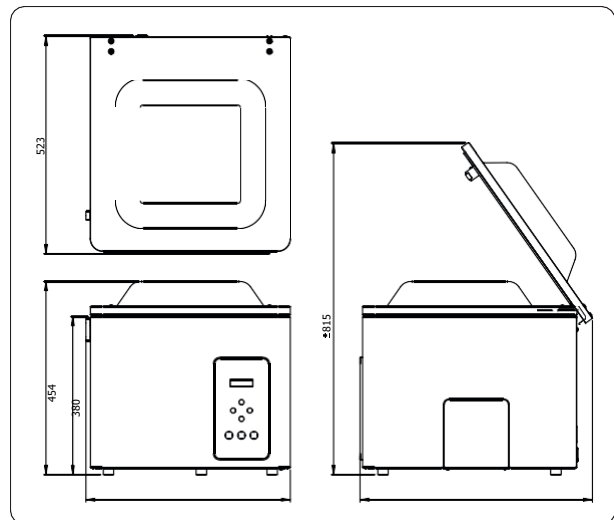

Henkelman Aust
Unit 3,14-16
Cairns Street, Loganholme
QLD Australia 4129
(07) 3806 5972

Sales/Service/Tech Support
sales@henkelman.com.au
Office Hours: 8am – 4pm
Open Monday - Friday

Technical information

Aero 42XL/42XL+



Characteristics

- With one sealing bar as standard (front)
 - With double seal as standard (two sealing wires)
 - Optional at no extra cost: Cut-off/wide seal
 - Pump maintenance and cleaning program.
 - Standard sensor
 - Three adjustable programs
 - Standard soft air
- Standard red meat program
 - Stainless steel casing and transparent lid
 - Supplied with three insert plates for a faster cycle and good positioning.



Options

- Liquid control

Accessories

- Inclined insert plate (for packing liquids)
- External adapter
- Maintenance set for standard maintenance
- Trolley with shelves



Specs	Aero 42XL	Aero 42XL+
Chamber LxWxH (mm)	460x420x180	460x420x180
Machine LxWxH (mm)	613x491x469	613x491x469
Voltage	230V-1-50Hz 100V-1-50/60Hz 110/115V-1-60Hz 220V-1-60Hz	
Pump capacity 50 Hz/60 Hz (m3)	16 / 19	21 / 25
Machine cycle 50 Hz/60 Hz (sec.)	14-45 / 12-40	13-35 / 11 - 31
Power (kW)	0,6 - 1,0	0,8 - 1,0
Weight (kg)	68	72
Net seal length (mm)	410	410
Sealing bar configuration - Standard - Option	standaard 	option 

Dimensions mm

